

UBLOCKOUT

Ultimate Blackout Shade

Product specifications

Product Specifications

	Frame	Fabric
Material	Powder coated aluminium	OEKO-TEX® STANDARD 100
Maintenance	Low maintenance, wipe with a slightly damp cloth to clean	Low maintenance, wipe with a slightly damp cloth to clean
UV protection	✓	✓
Fade resistant	✓	✓
Interchangeable	✓	✓
Compatible with	  	
Performance Guarantee	100% Blackout Guarantee	
Measure Protection	Measure Guarantee* (added at checkout)	
Warranty	5-Year Limited Warranty*	

Product Specifications

Inside Mount		Width (inches)		Height (inches)		Depth (inches)	
Operation	Orientation	Min	Max	Min	Max	Min	Max
Manual	Top to Bottom	8"	98"	16"	100"	1 (3/8)"	2 (1/2)"
	Bottom to Top	8"	24"	16"	100"	1 (3/8)"	2 (1/2)"
Motorized	Top to Bottom	22"	98"	16"	100"	1 (3/8)"	2 (1/2)"
	Bottom to Top	22"	60"	16"	100"	1 (3/8)"	2 (1/2)"


Requirements At least 1" of unobstructed recess depth

Outside Mount		Width (inches)		Height (inches)		Depth (inches)	
Operation	Orientation	Min	Max	Min	Max	Min	Max
Manual	Top to Bottom	8"	96"	16"	96"	1 (3/8)"	2 (1/2)"
	Bottom to Top	-	-	-	-	-	-
Motorized	Top to Bottom	22"	96"	16"	96"	1 (3/8)"	2 (1/2)"
	Bottom to Top	-	-	-	-	-	-

Requirements At least 2" of bare wall space or flat window trim


Inside Mount

Assembled Frame Isometric View

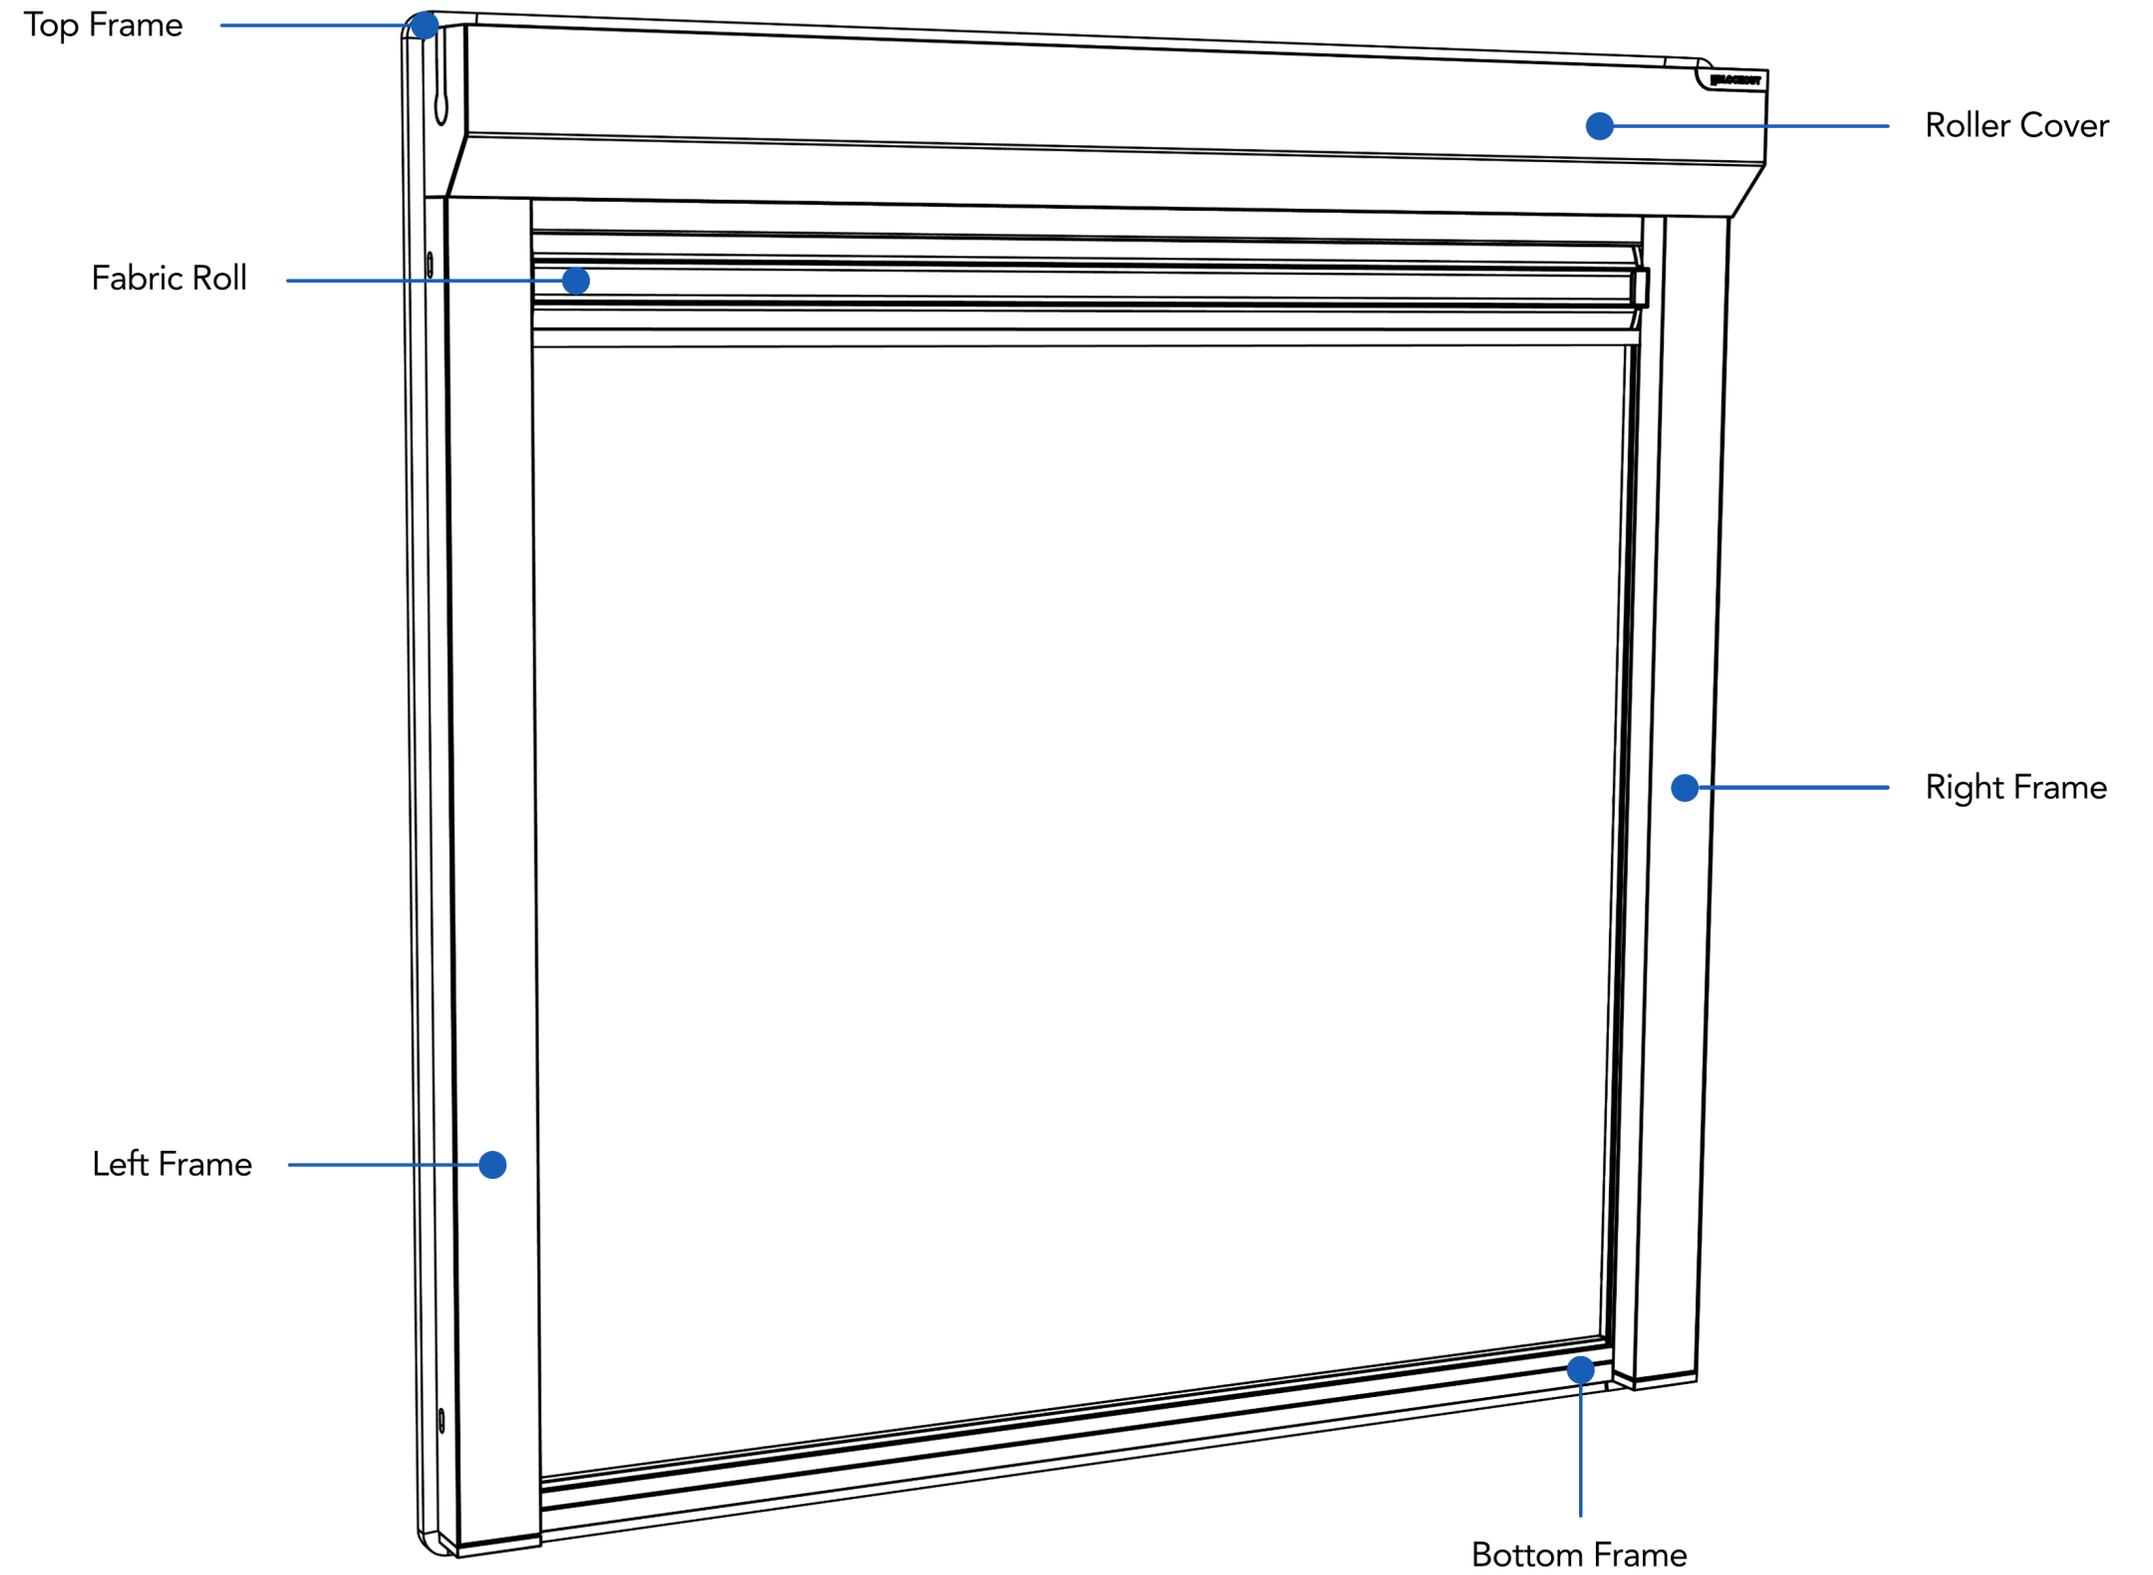


Inside Mount

Assembled Frame Front View

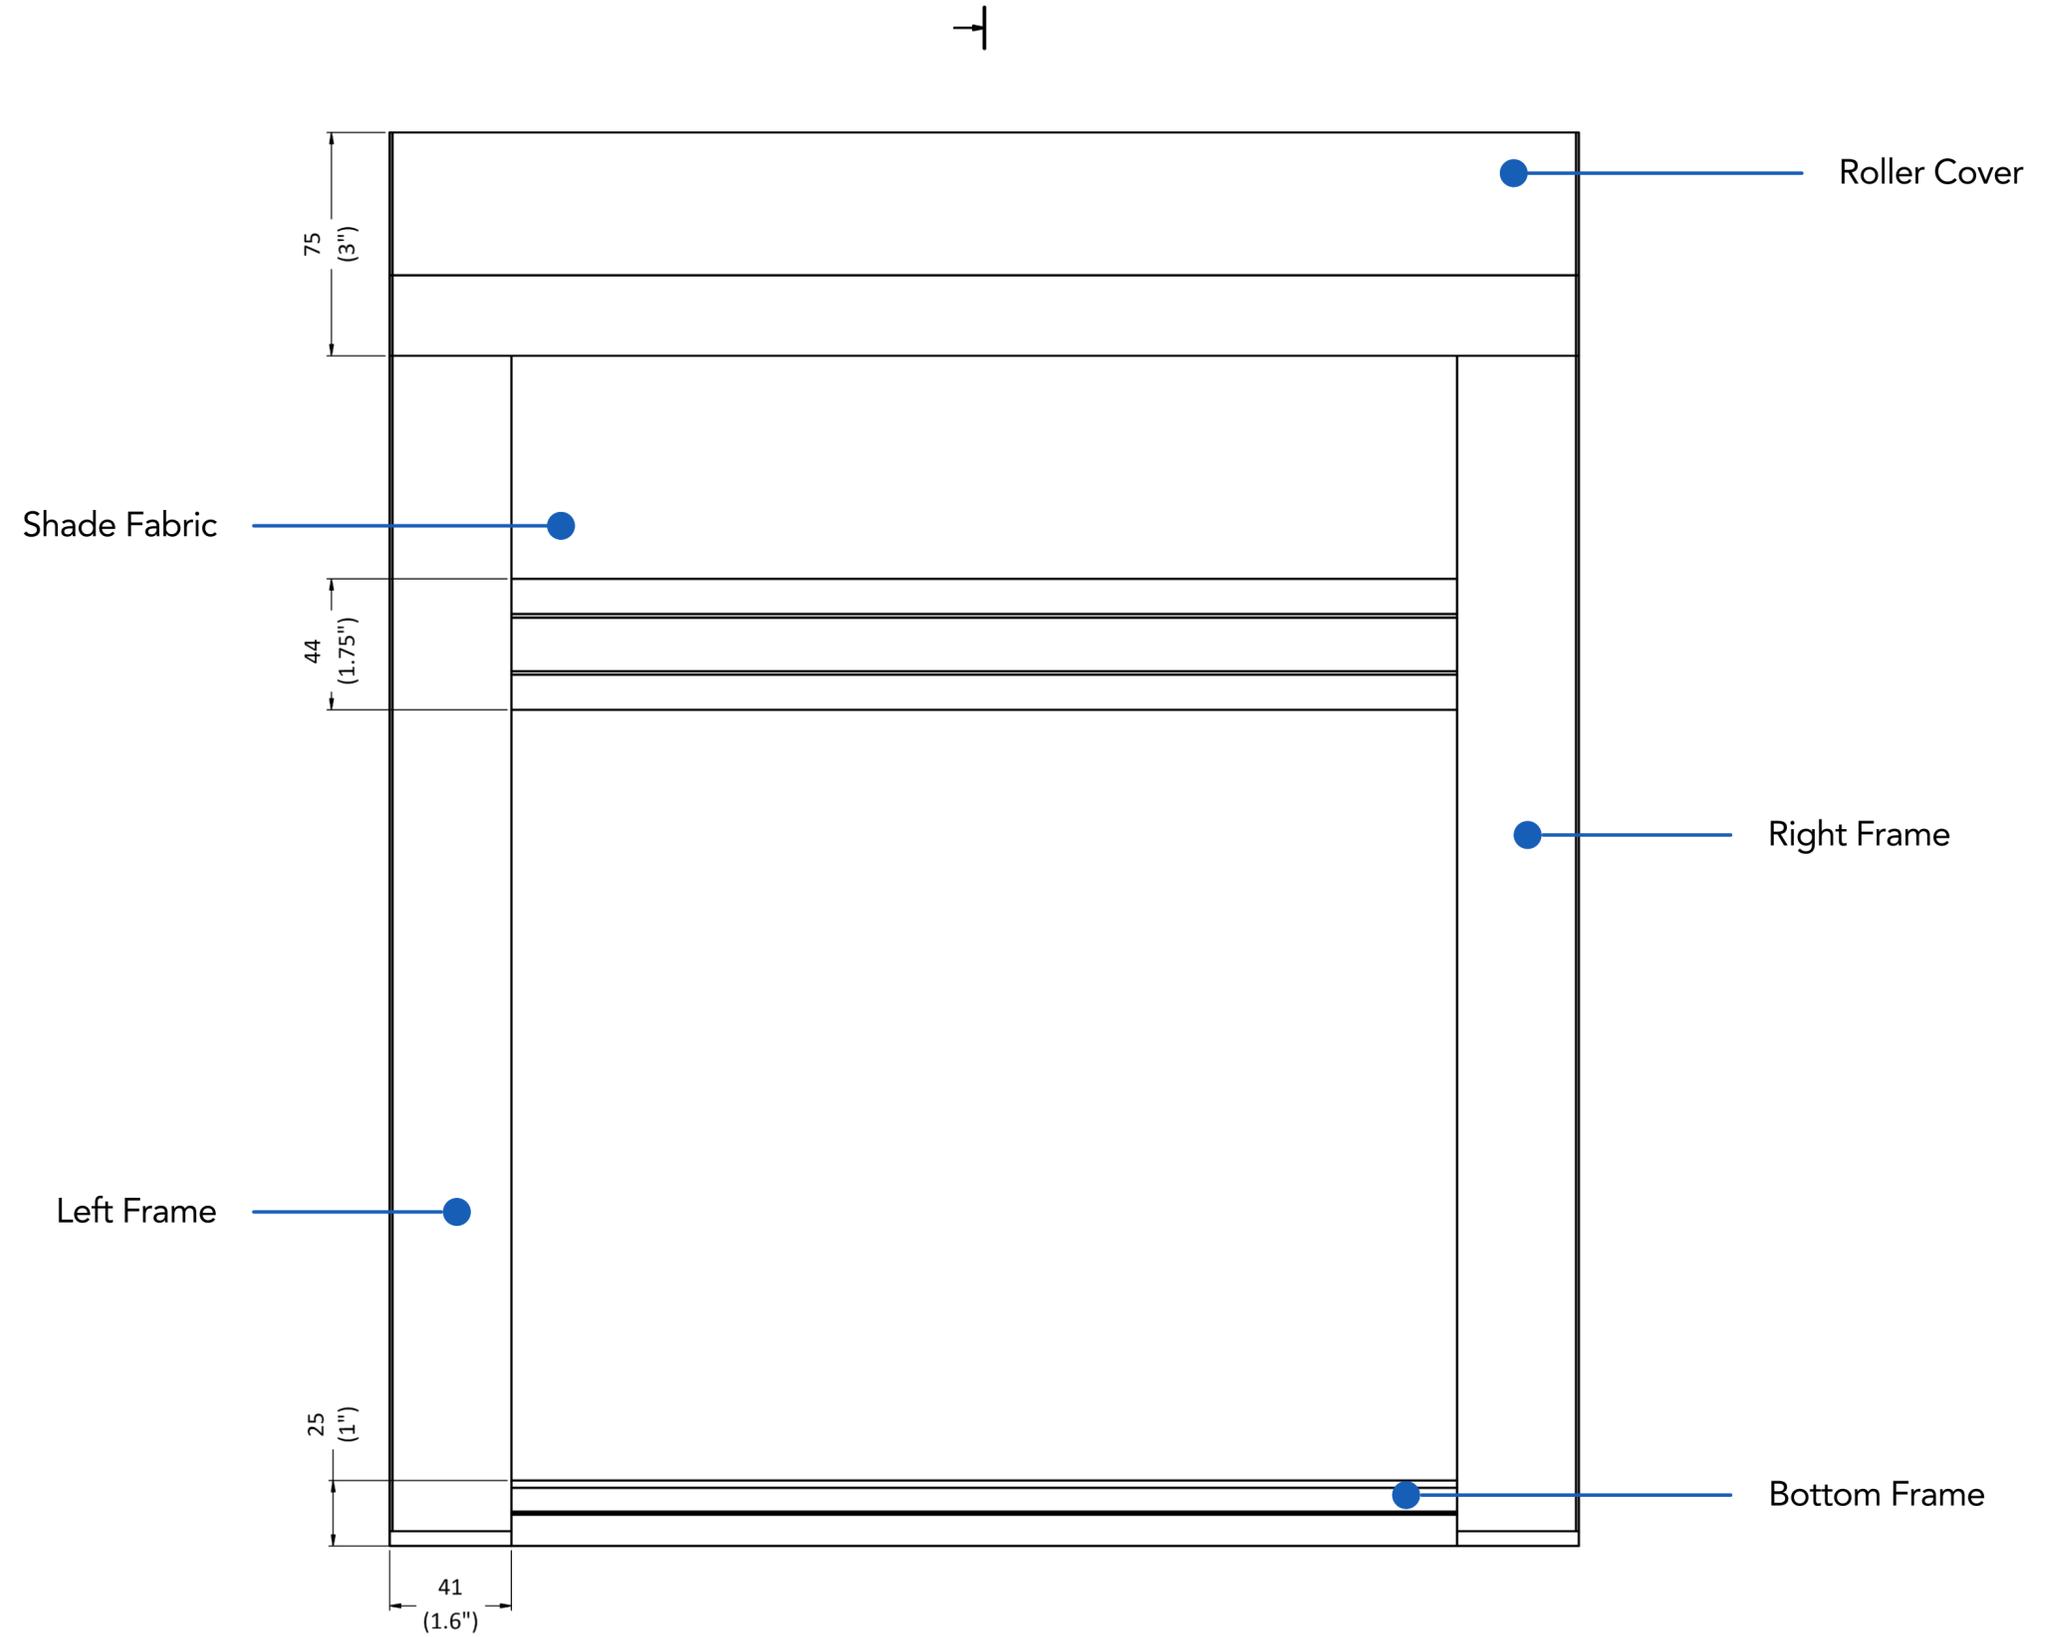


Inside Mount

Fabric Roll Side Profile View

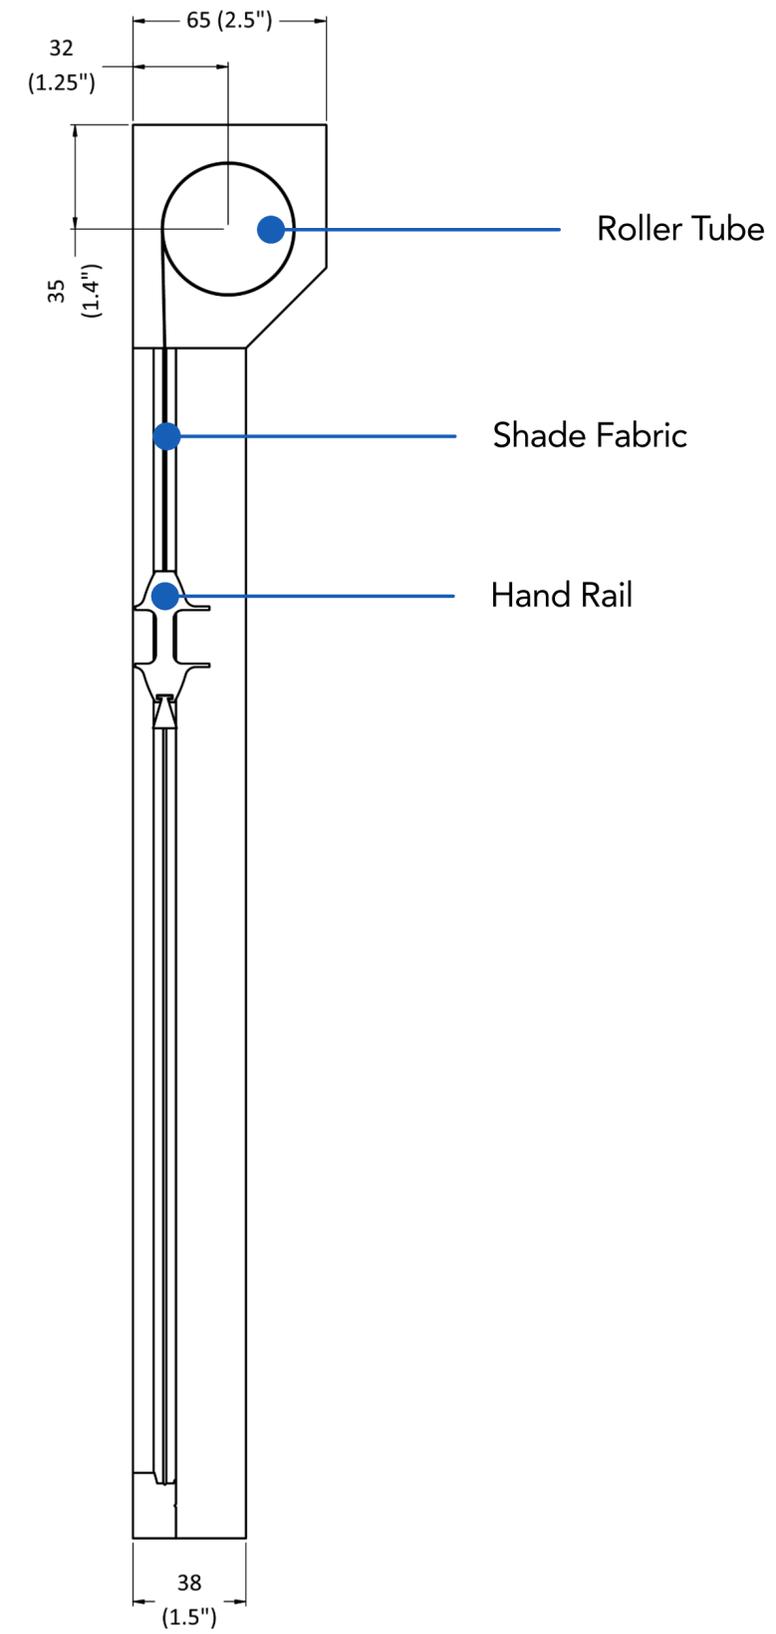


Inside Mount

Side Frame Side Profile View

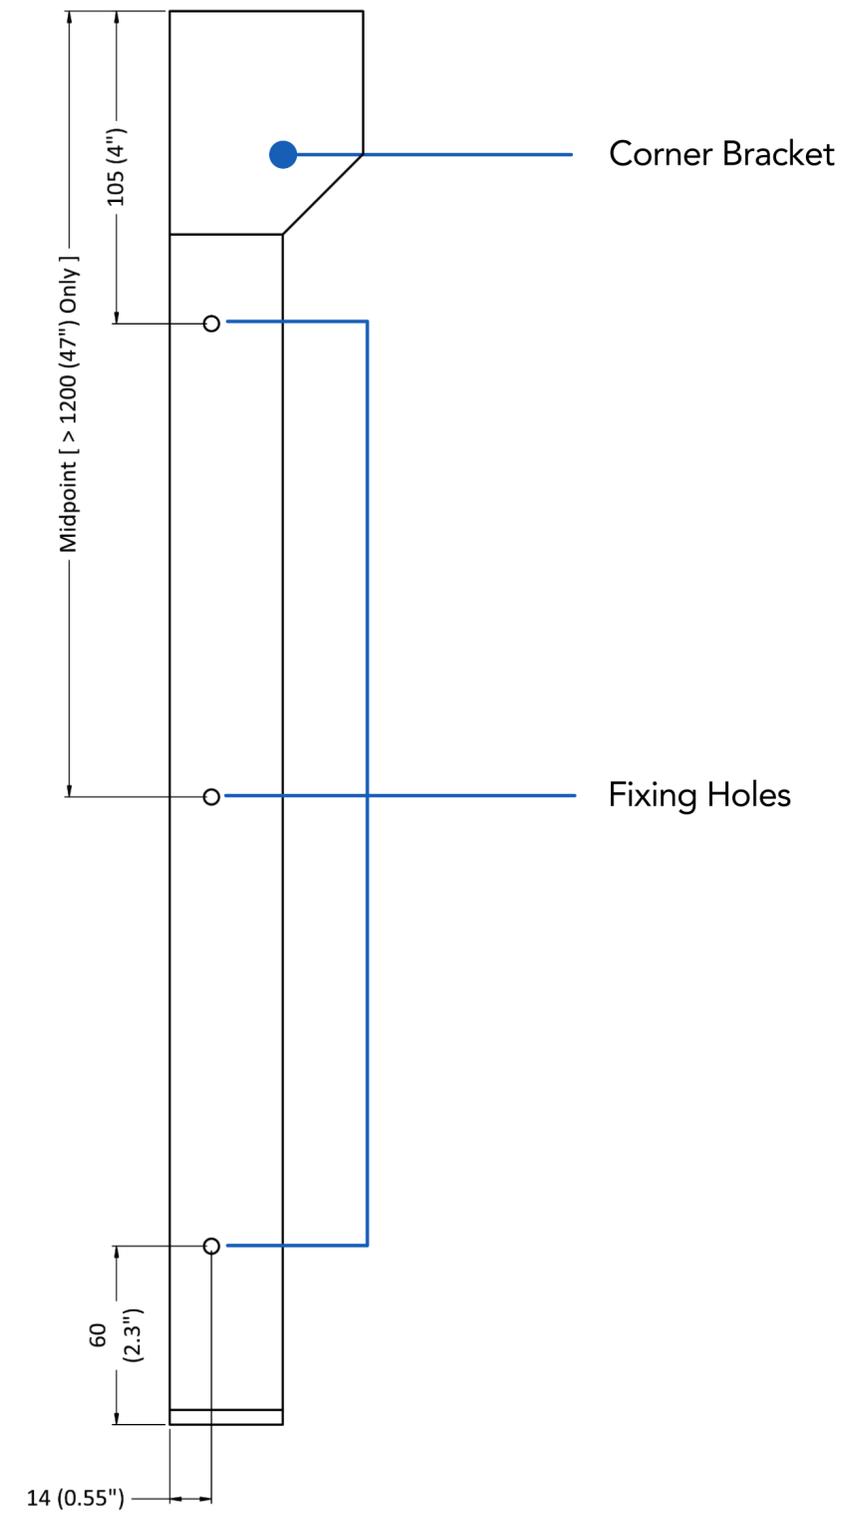


Outside Mount

Assembled Frame Isometric View

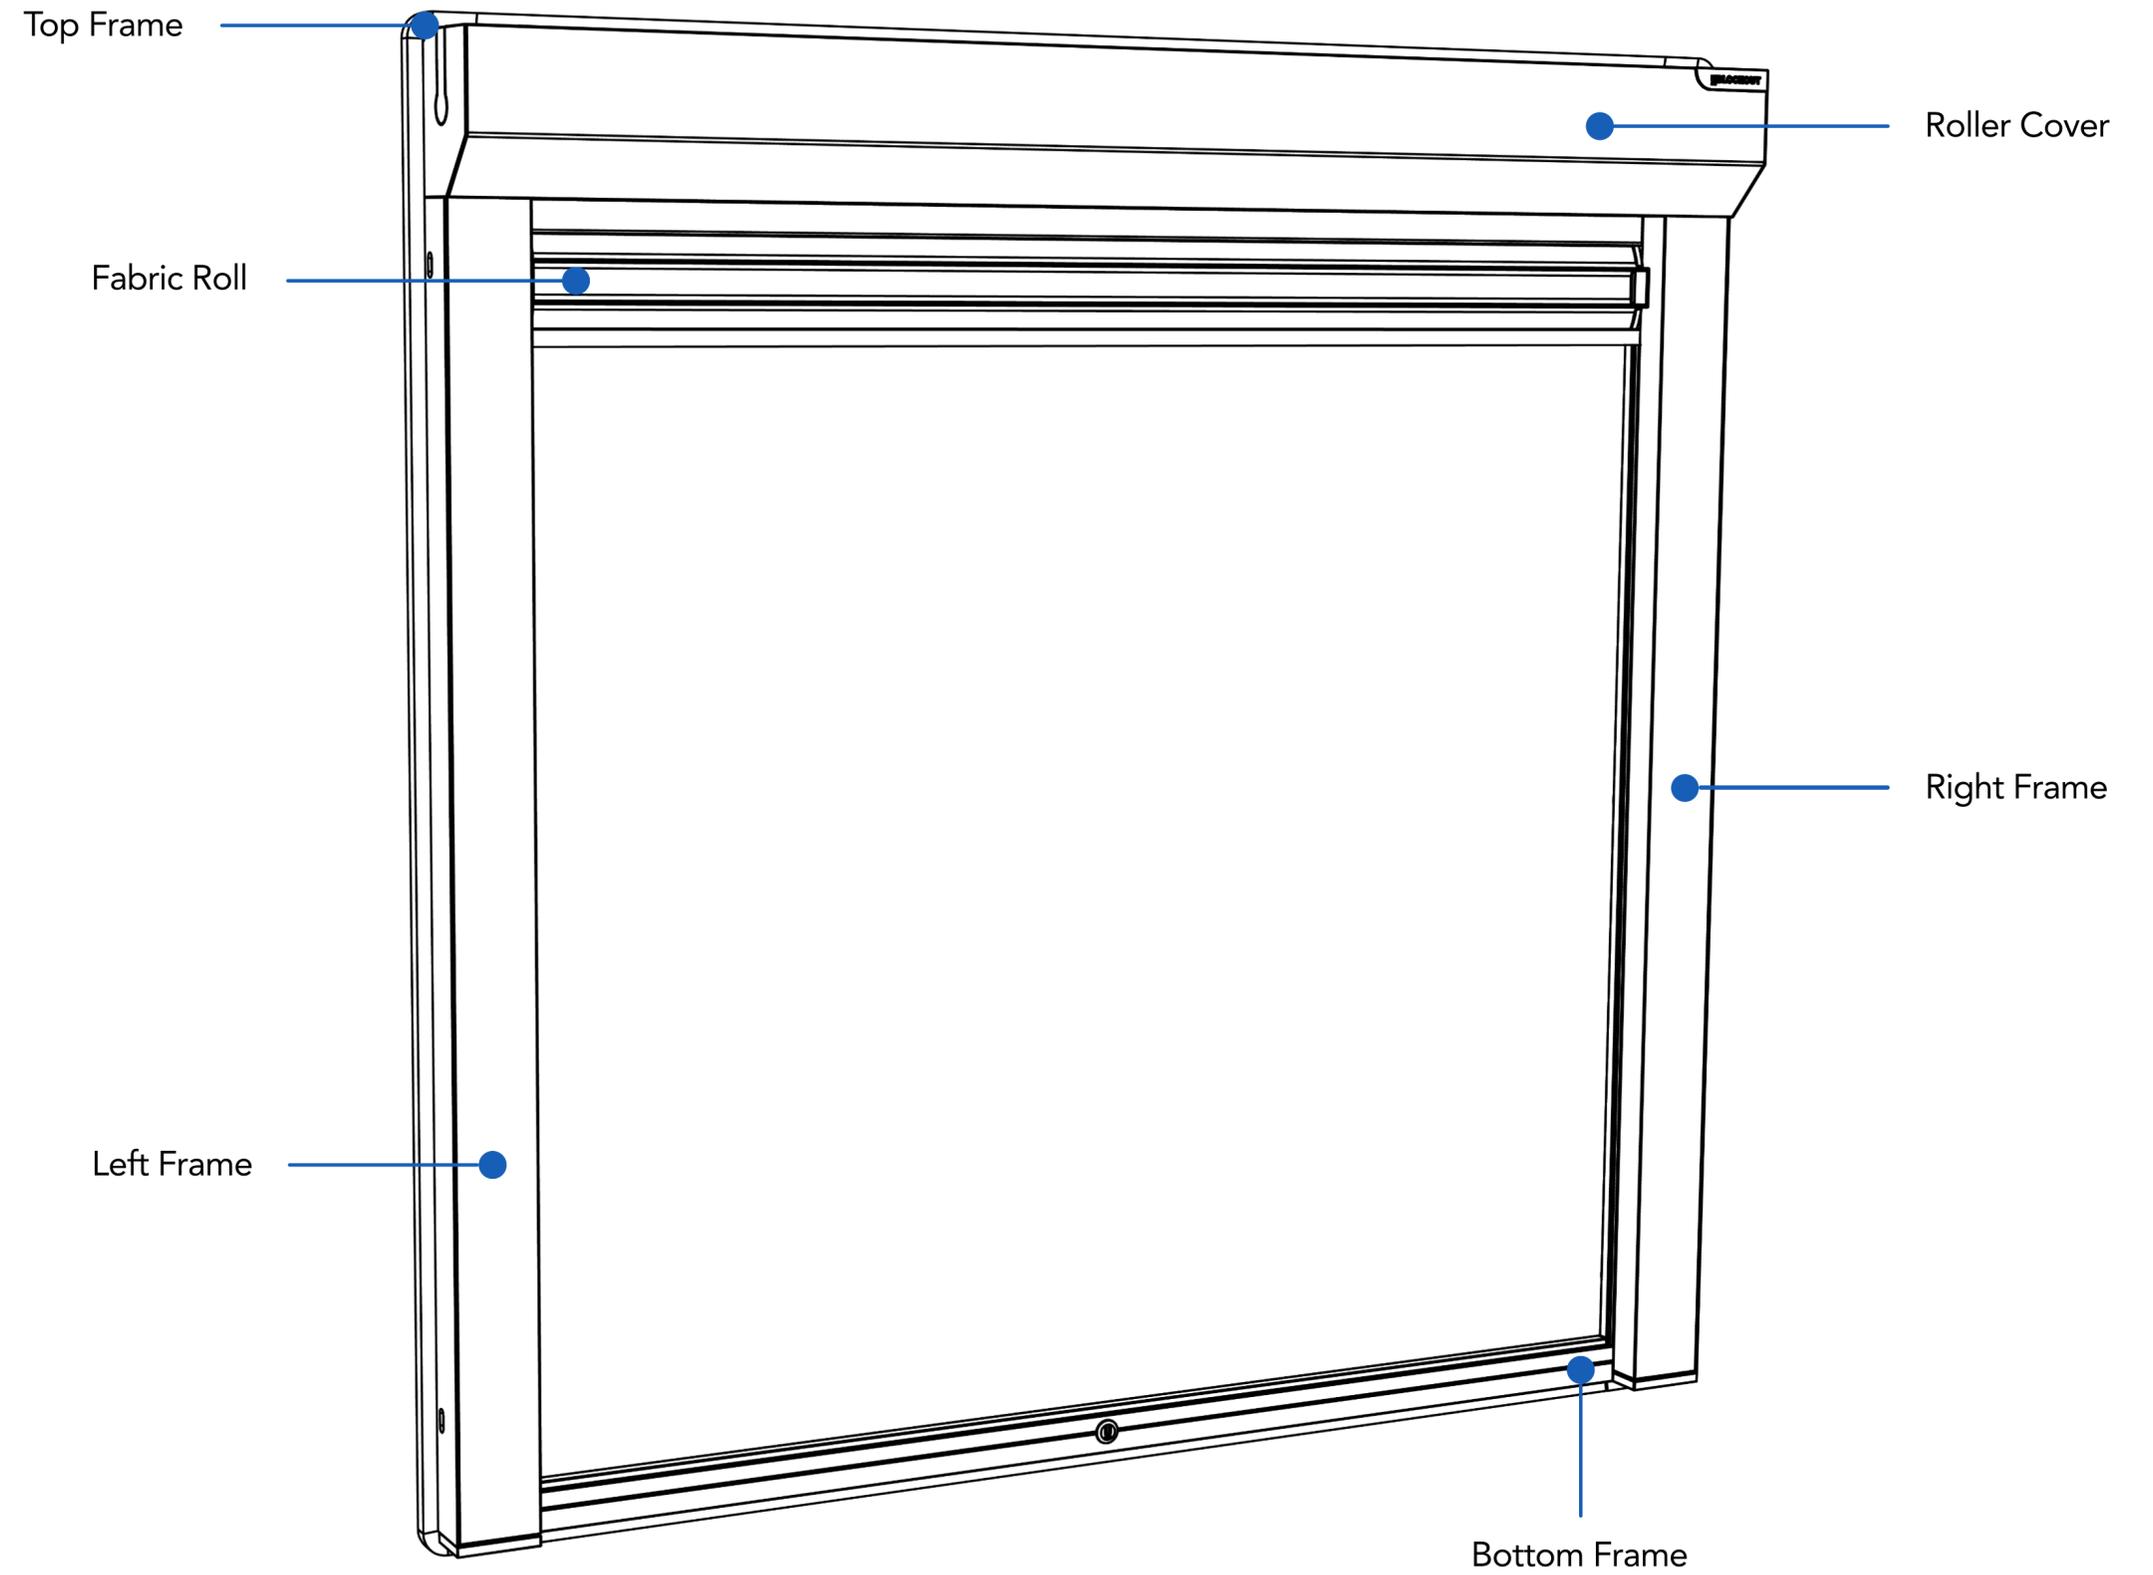


Outside Mount

Assembled Frame Front View

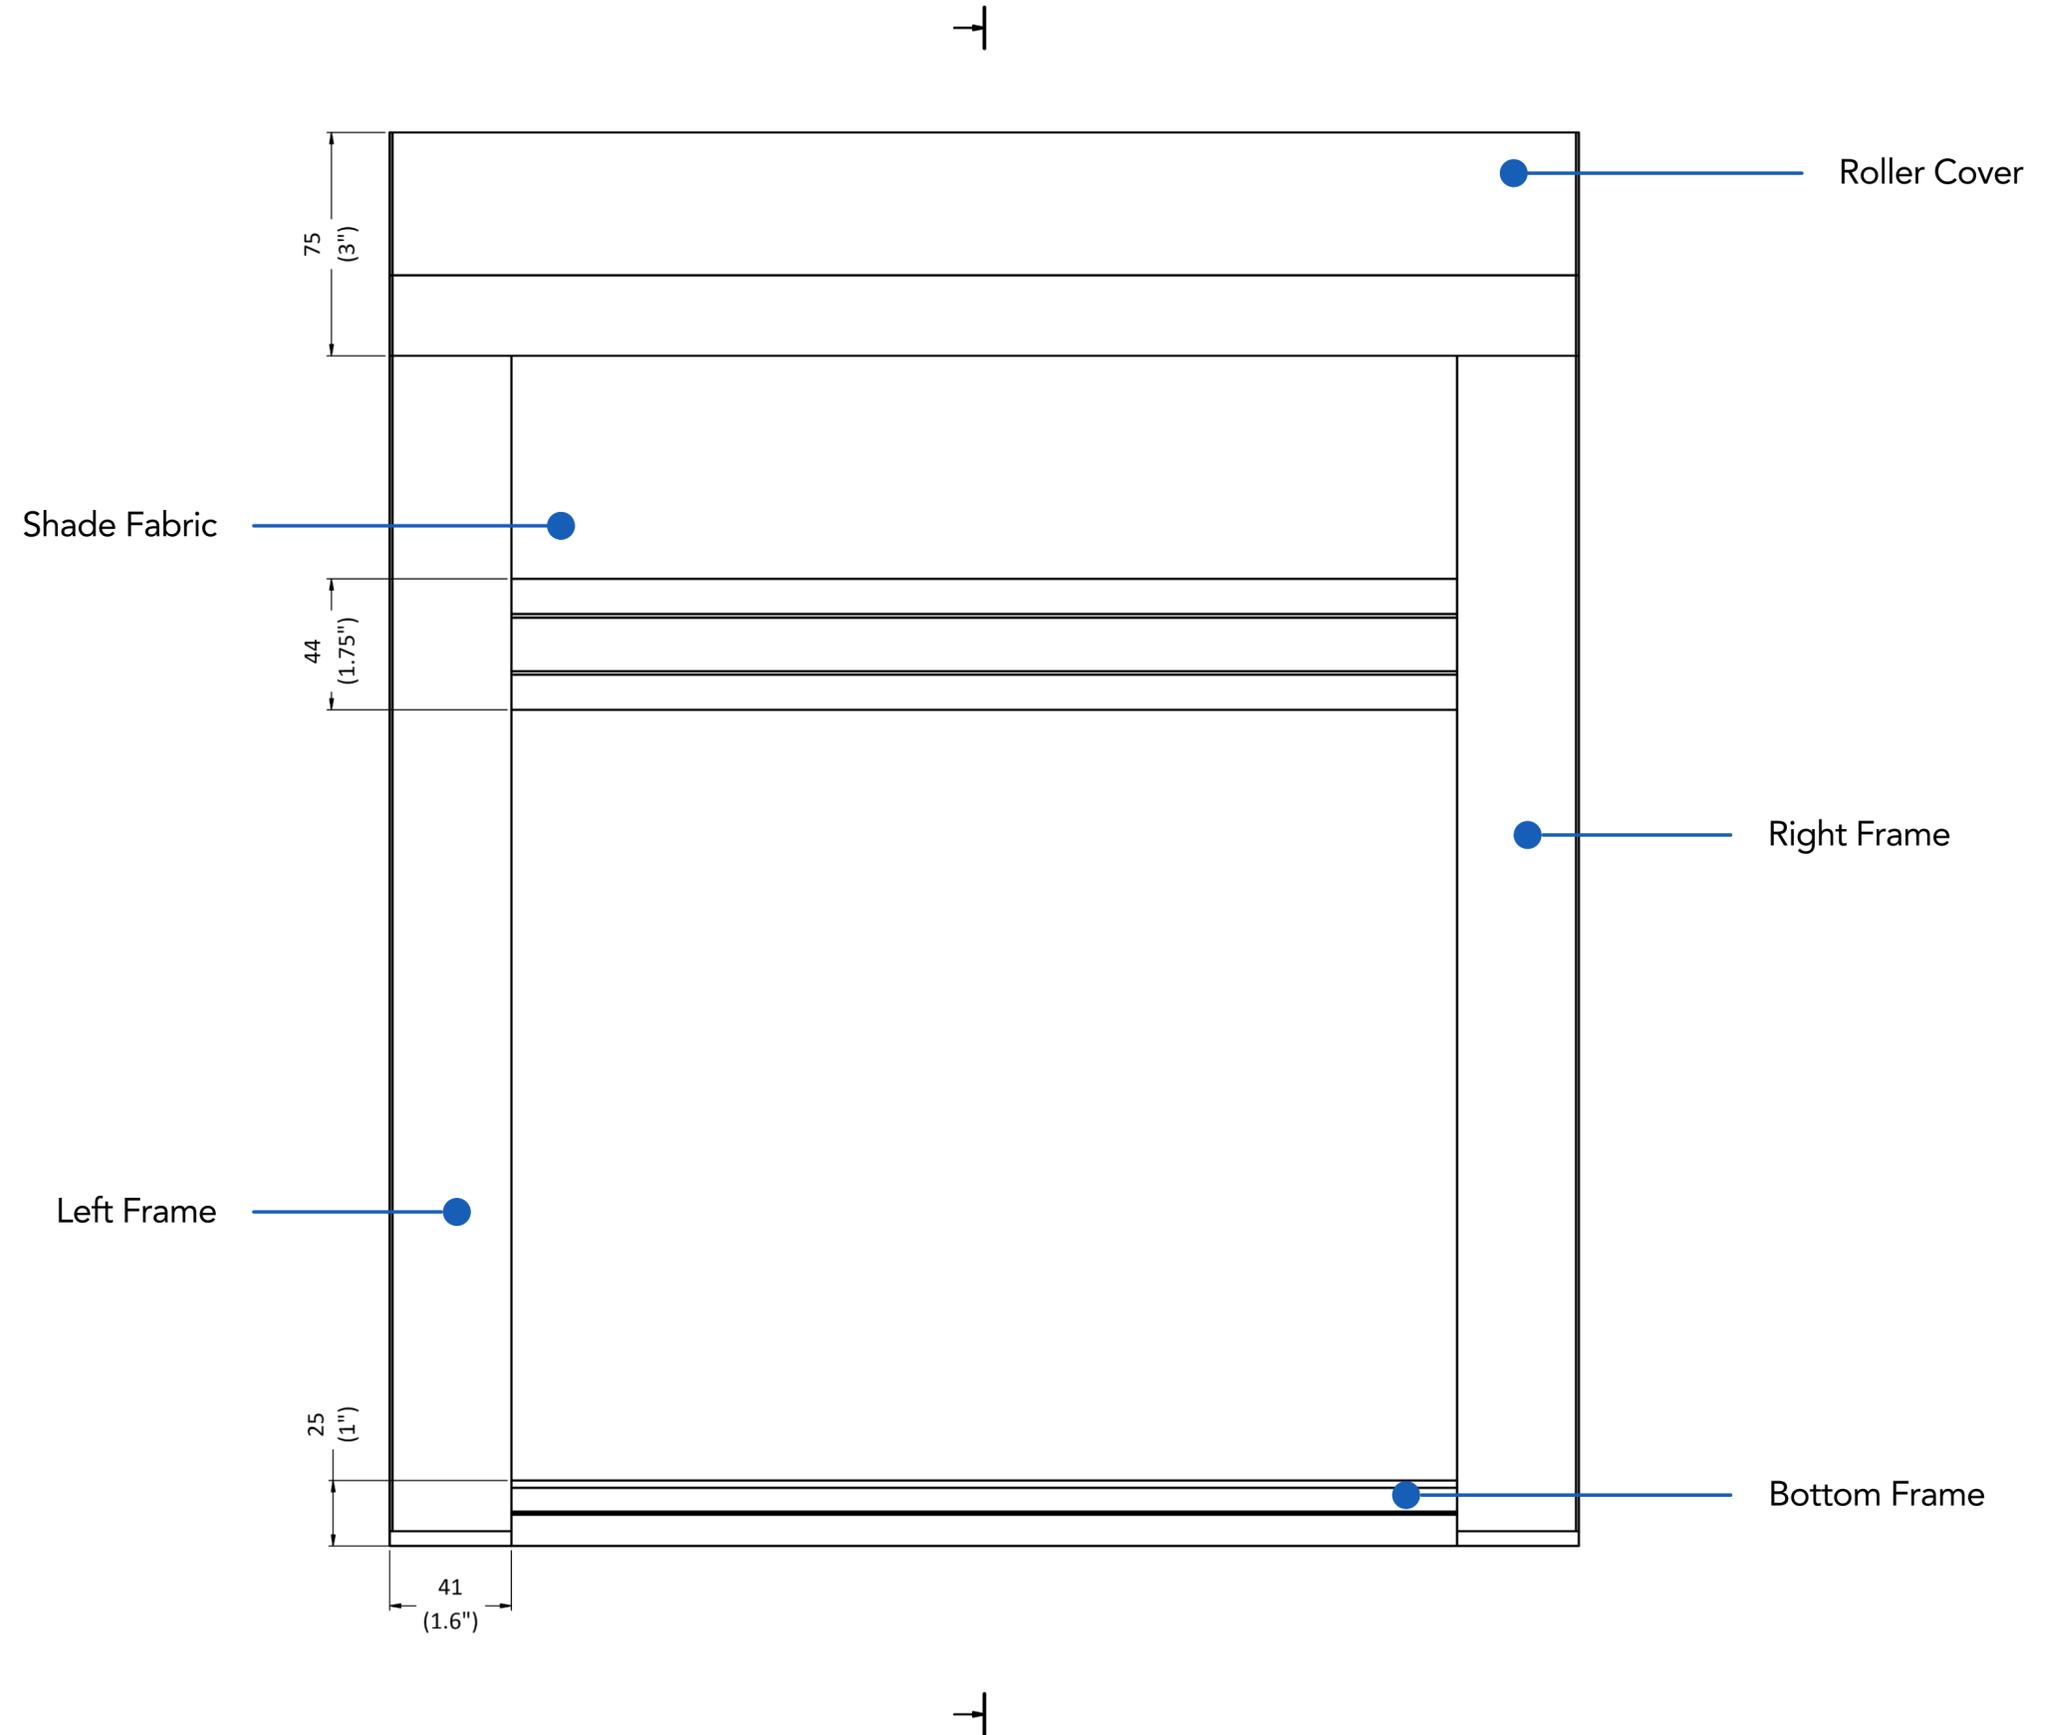


Outside Mount

Fabric Roll Side Profile View

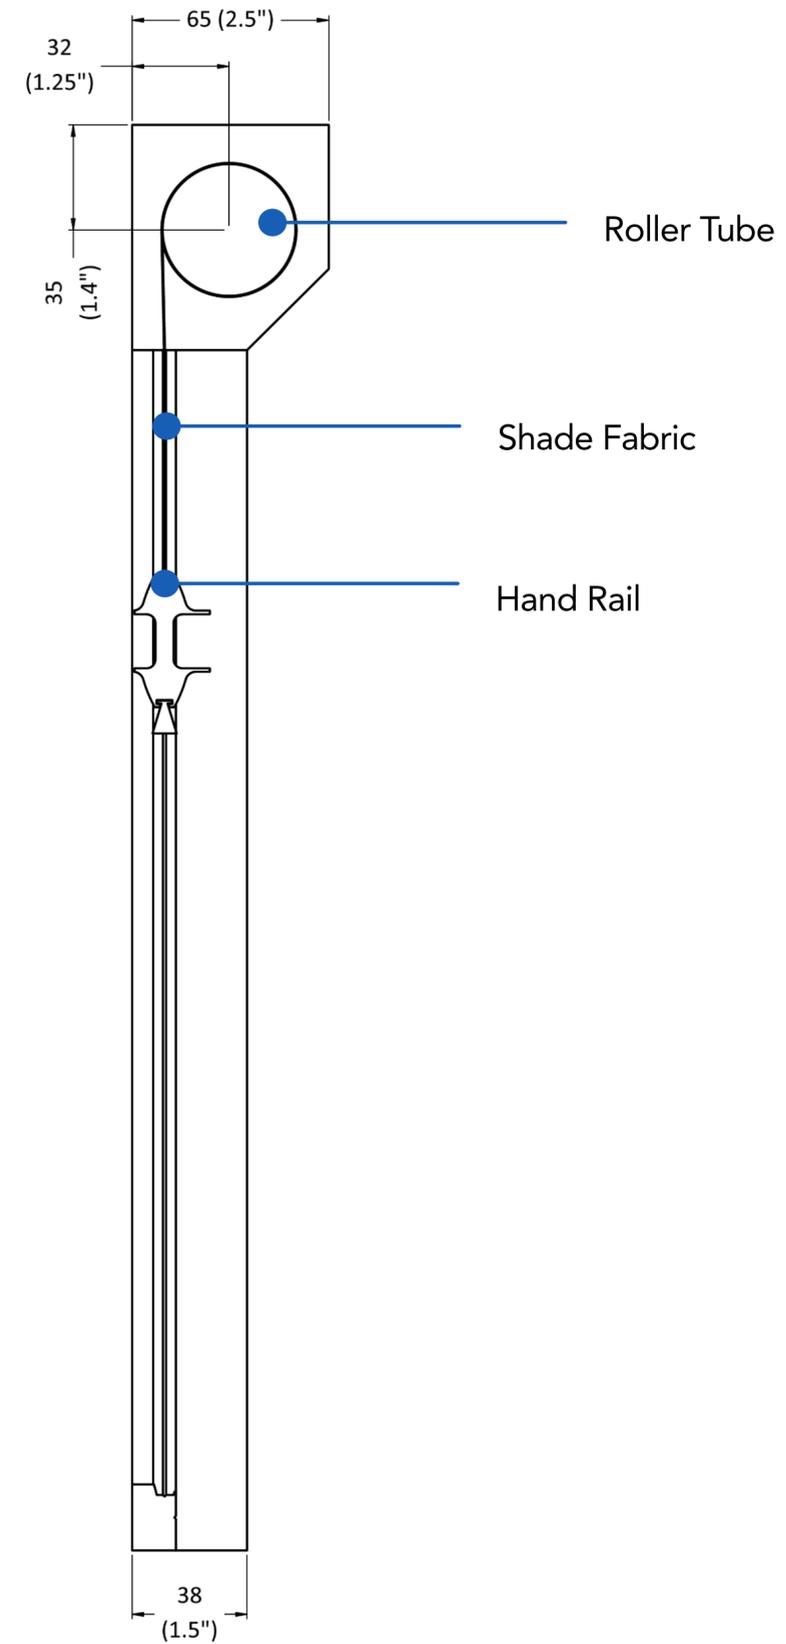


Outside Mount

Side Frame Side Profile View

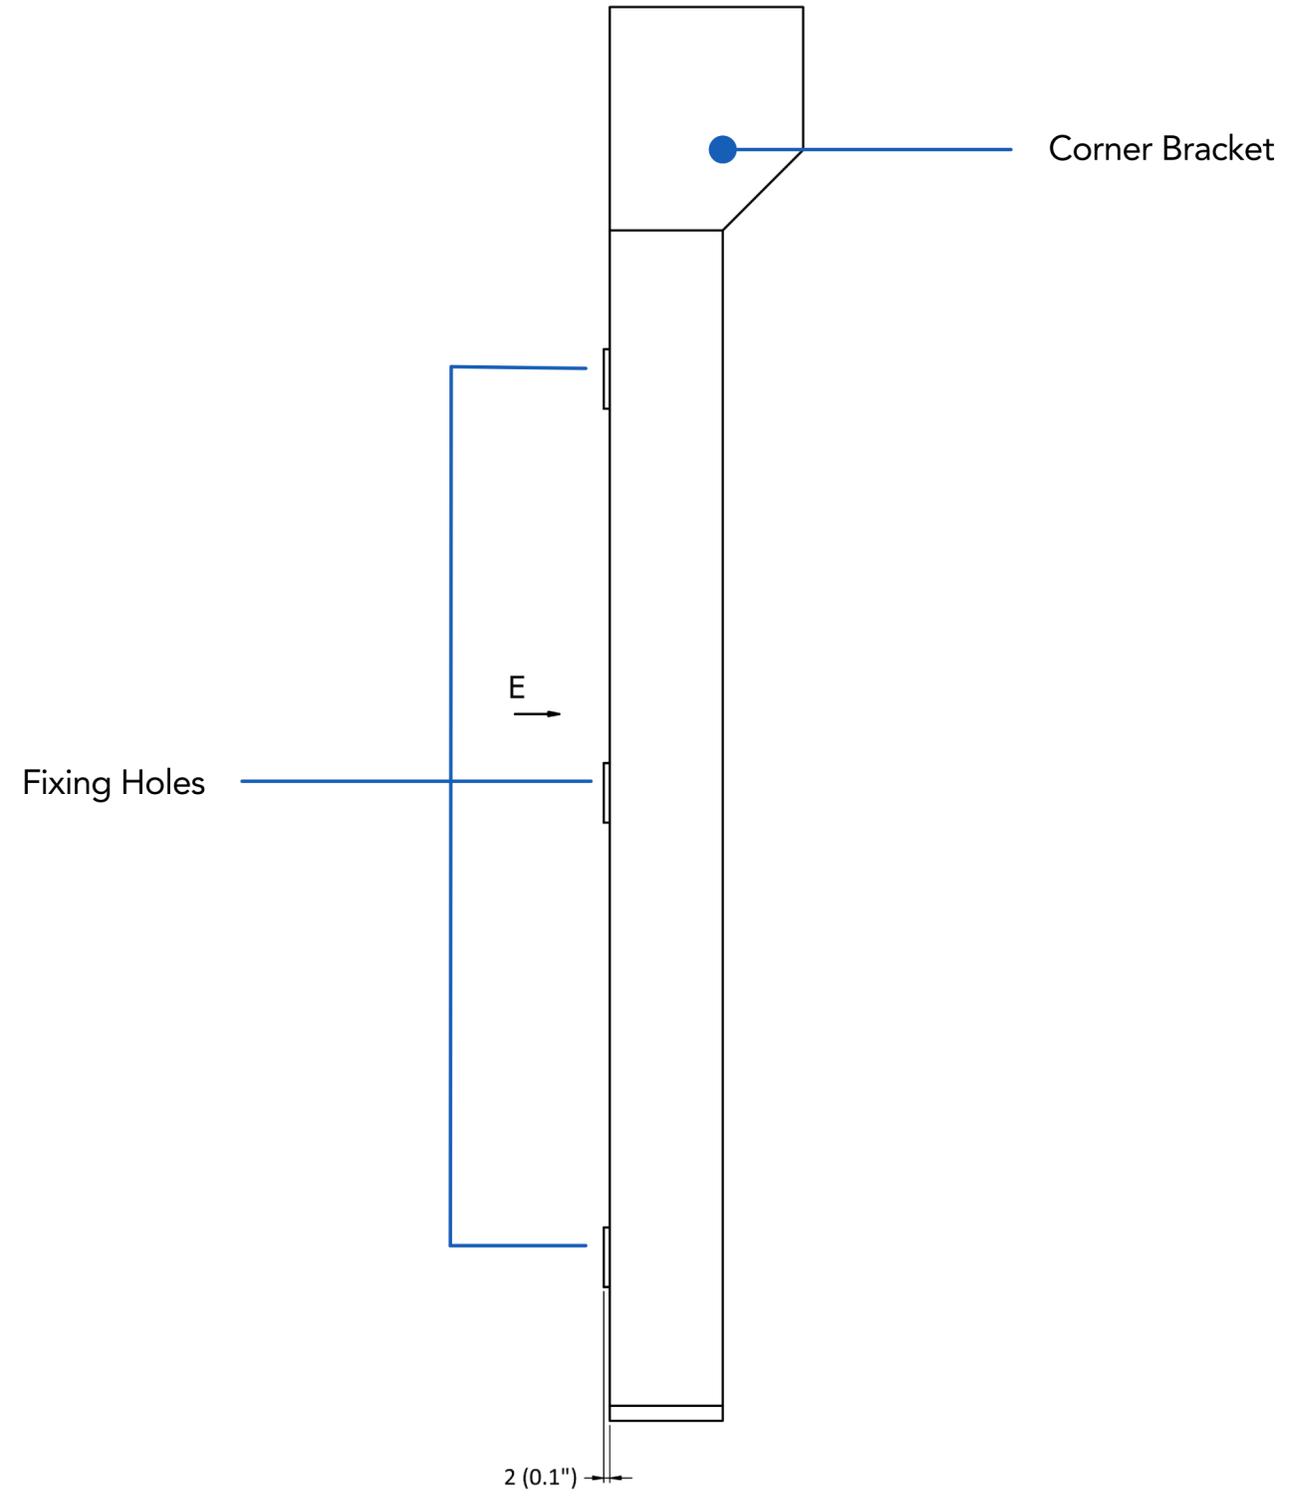

Outside Mount

Side Frame Rear View

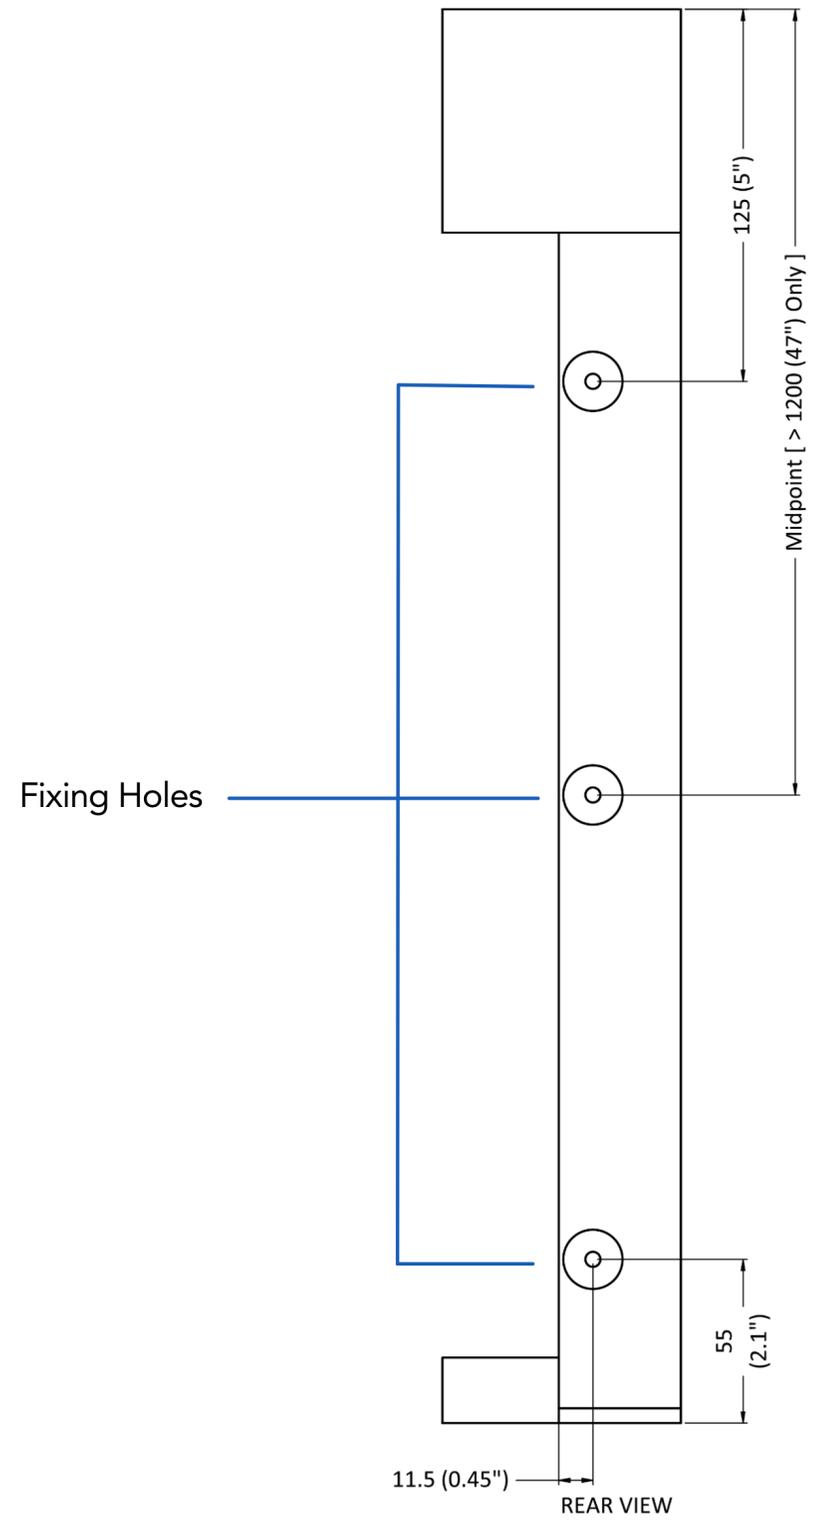

Have a question? We're here for you

Live chat

Connect with us for real-time assistance

Email us

support@ublockout.com

Call us

(888) 488-4302